





Get familiar with our products.

At a glance:

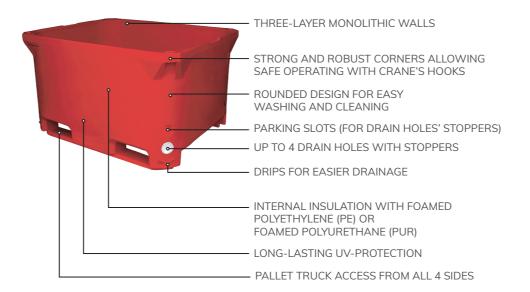

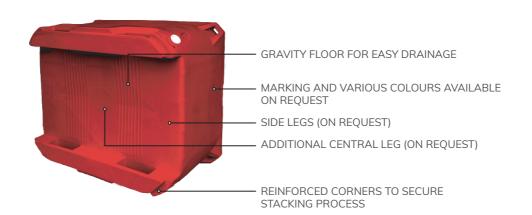



ul. Artura Grottgera 16 C 76–200 Słupsk, Poland (PL) +48 59 845 50 00 info@fach-pak.com

fach-pak.com

fach-pak.com

FACH-PAK manufactures and supplies the highest quality specialised insulated hygienic containers for food processing especially fish, meat and poultry.

FACH-PAK insulated containers are triple-walled monolithic constructions made of durable plastic, filled inside (between the walls) with foamed polyethylene (PE) or polyurethane (PUR). The entire internal space of the container is tightly filled with a given insulation.

The highest quality materials used in process of manufacturing areapproved by National Institute of Public Health (PZH), Sanitary Inspectorate and FDA, allowing them to come into direct contact with food without any risks.

FACH-PAK insulated containers, thanks to their monolithic structure, are environmentally friendly and are fully recyclable. The lack of edges and smooth walls help maintain and promote hygiene. They application is mainly dedicated to food processing, especially fish, meat and poultry.

FACH-PAK containers' workmanship is based on formulas developed over the years by our dedicated research and development team.





FOOD PROCESSING



POULTRY PROCESSING



WASTE MANAGMENT





DAIRY PRODUCTS AND BREAD

PUR Insulation polyurethane foam

FOOD CONTACT

COMPLIANCE

Used when thermal insulation is necessary, e.g. in places with limited access to refrigeration equipment or when there are extremely high or very low temperatures.



TYPE 70 PUR 750x485x390 mm

TYPE 380 PUR

TYPE 605 PUR

1200x1000x760 mm

TYPE 650 PUR

1230x1030x750 mm

950x750x750 mm

APPLICATION



TYPE 100 PUR 805x530x425 mm



TYPE 310 PUR 915x715x710 mm



TYPE 460 PUR 1230x1030x580 mm

TYPE 620 PUR

1220x1010x750 mm

TYPE 660-3 PUR

1230x1030x750 mm



TYPE 600 PUR 1200x1000x750 mm



TYPE 630 PUR 1200x1000x785 mm



TYPE 1000 PUR 1470x1180x890 mm

PE Insulation polyethylene foam



APPLICATION

Wherever above-standard strength, high load-bearing capacity of any load and increased thermal-insulation parameters are required.



TYPE 310 PE 915x715x710 mm



TYPE 380 PE 950x750x750 mm



TYPE 400 PE 1200x1000x570 mm



TYPE 460 PE 1230x1030x580 mm



TYPE 600 PE 1200x1000x750 mm



TYPE 605 PE 1200x1000x760 mm



TYPE 620 PE 1220x1010x750 mm



TYPE 630 PE 1200x1000x785 mm



TYPE 650 PE 1230x1030x750 mm



TYPE 1000 PE 1470x1180x890 mm



info@fach-pak.com fach-pak.com

